PENBERTHY, INC.

LEVELMARK™

320 Locust Street • Prophetstown, IL 61277-1147
Phone: (815) 537-2311 • Fax: (815) 537-5764

Section L1000
Application L1771
Issued 9/92
Replaces 3/86

APPLICATION FORM - ultrasonic liquid level switch
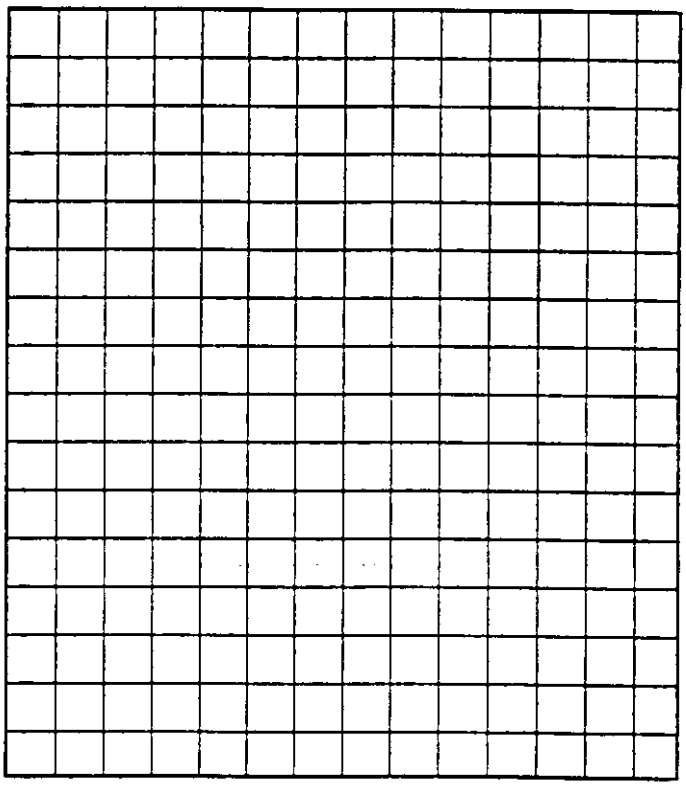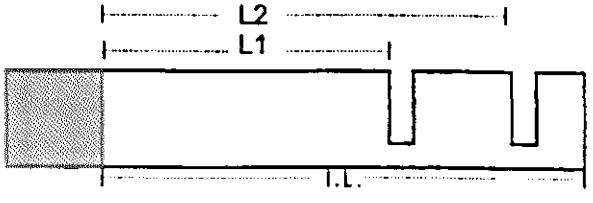
1. Rep. Firm:_____ Date:_____
   Customer Name:_____ Phone:_____
   Company:_____
   Address:_____ State:_____
   _____ Zip:_____
   City:_____ Country:_____
2. Number of units to be quoted_____ Potential number of units_____ Delivery expected_____
3. MATERIAL_____
   ☐ Liquid ☐ Slurry-% solids_____
   Maximum Normal Minimum
4. PRESSURE (PSIG) _____ _____ _____
5. TEMPERATURE (°F) _____ _____ _____
6. COATING:
   How much material build-up on sensor? _____ inches
7. AGITATION
   ☐ None ☐ Light ☐ Strong
   Bubbles present? ☐ yes ☐ no
8. MOUNTING
   ☐ NPT: (3/4" standard) size _____ inches
   ☐ Flange: size/rating_____
9. WETTED METAL PARTS (316STS Standard)
   _____
10. OUTPUT
    ☐ Optoisolator (614, 616 only) ☐ Relay_____ (614, 616 only) (Rating) ☐ 4-20 mA loop (624, 626 only)
11. POWER INPUT TO ELECTRONIC UNIT
    ☐ 115 Vac (614, 616 only) ☐ 230 Vac (614, 616 only) ☐ 24 Vdc
12. SENSOR LENGTH
    Single-Point
    L1 = _____ (actuation point)
    I.L. = L1 + 1 3/4"
    Dual-Point
    L1 = _____ (upper)
    L2 = _____ (lower)
    I.L. = L2 + 1 3/4"
13. APPROVALS
    ☐ None ☐ FM ☐ FM & CSA
14. REMARKS: _____
15. Please show the preferred mounting location, whether through a nozzle or threaded wall, and any internal obstructions, such as agitators, heating coil, etc. Show product feed and discharge points.