
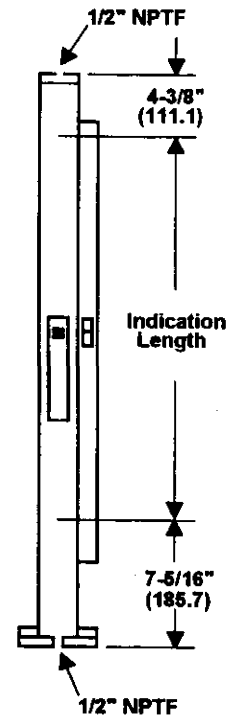
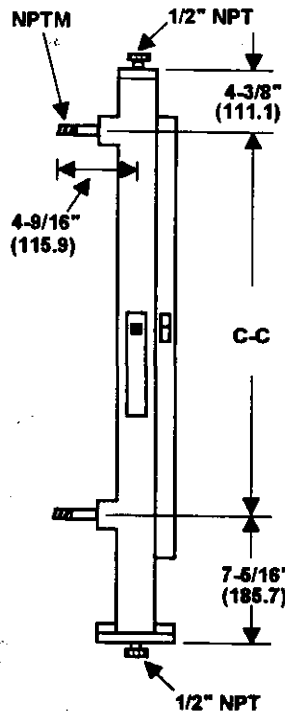


PENBERTHY

dimensions

Section 4000
 Dimensions 4704
 Issued 01/96
 Replaces 4/93

For: **MULTIVIEW™** LIQUID LEVEL METER -- PVC & CPVC

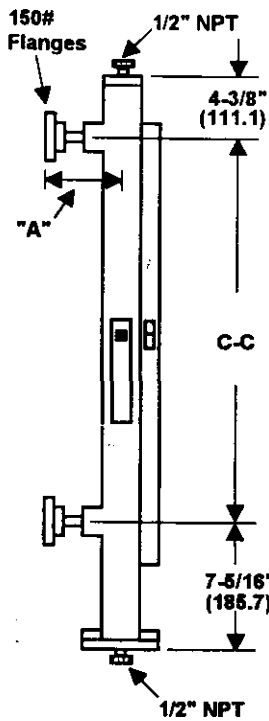

* All Flange Connections Larger Than 1" will be Reducing Flanges

Connection Size (Side)	Minimum "C-C" in Inches (mm)	Dimension "A" in Inches (mm)
1/2" NPTM	4 1/4 (107.8)	N/A
3/4" NPTM	5 1/8 (130.1)	N/A
1" NPTM	8 3/4 (222.1)	N/A
1/2" Flanged	4 1/4 (107.8)	4 9/16 (115.8)
3/4" Flanged	5 1/8 (130.2)	4 9/16 (115.8)
1" Flanged	8 3/4 (222.1)	4 9/16 (115.8)
1 1/4" Flanged*	8 3/4 (222.1)	4 15/16 (125.3)
1 1/2" Flanged*	8 3/4 (222.1)	5 (126.9)
2" Flanged*	8 3/4 (222.1)	5 1/16 (128.5)
2-1/2" Flanged*	8 3/4 (222.1)	5 3/16 (131.7)
3" Flanged*	8 3/4 (222.1)	5 1/4 (133.2)

Minimum Overall Length in Inches (mm)
15 15/16 (404.5)

Float Length in Inches (mm)
7 5/8 (193.5)

Certified For: (Dimensions are not for construction unless certified).

Customer: _____

Order Number: _____

Quantity: _____

Material: _____

Date: _____

Certified By: _____